

SMALL-SCALE C&I ESS SOLUTION

DEYE SUMMER **BOS** SERIES



Smart

- Protect against over-discharge, over-charge, over-current, and extreme temperatures
- Automatically manage charge, discharge, and cell balancing



Safe and Reliable

- (LFP) Battery : Safe, long-lasting, high-efficiency
- Less self-discharge, up to 6 months without charging
- No memory effect, excellent with shallow charge and discharge



Flexible

- Multiple battery modules can be in parallel
- Support USB and remote upgrades
(Compatible with Deye inverter)



Excellent Performance

- Working temperature range : -20°C ~ 55°C
- Excellent discharge performance and cycle life

≥6000

Cycles

Wide
Temperature

-20°C to 55°C

70%

EOL

Multiple

battery series configurations




Model		BOS-W			
Main Parameter					
Cell Chemistry		LiFePO ₄			
Module Energy (kWh)		5.12			
Module Nominal Voltage (V)		51.2			
Module Capacity (Ah)		100			
Battery Module Number		BOS-W25	BOS-W40	BOS-W60	BOS-W80
Battery Module Qty In Series (Optional)		5 (Min)	8	12	16
System Nominal Voltage (V)		256	409.6	614.4	819.2
System Operating Voltage (V)		220 ~ 292	352 ~ 467.2	528 ~ 700.8	704 ~ 934.4
System Energy (kWh)		25.6	40.96	61.44	81.92
System Usable Energy (kWh) ¹		23.04	36.86	55.3	73.73
Rated DC Power (kW)		25.6	40.96	61.44	81.92
Charge / Discharge Current (A) ²	Recommend	50			
	Nominal	100			
	Peak Discharge(2 mins, 25°C)	125			
Working Temperature (°C)		Charge : 0 ~ 55 / Discharge : -20 ~ 55			
Status Indicator		Yellow : Battery High Voltage Power On Red : Battery System Alarm			
Communication Port		CAN2.0 / RS485			
Humidity		5% ~ 85%RH			
Altitude		≤3000m			
IP Rating of Enclosure		IP20			
Weight Approximate (kg)		249	387	571	755
Installation Location		Rack Mounting			
Storage Temperature (°C)		0 ~ 35			
Recommend Depth of Discharge		90%			
Cycle Life		25±2°C, 0.5C / 0.5C, EOL70%≥6000			
Warranty ³		5 years			
Certification		UN38.3			


1. DC Usable Energy, test conditions : 90% DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
2. The current is affected by temperature and SOC.
3. The warranty is due whichever reached first of warranty period or life cycle power.
4. Made in China.

Typical Application Scenarios


BOS-W60

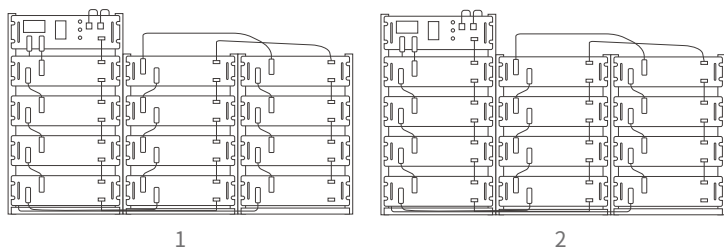


Maximum support for 16 racks of batteries in parallel

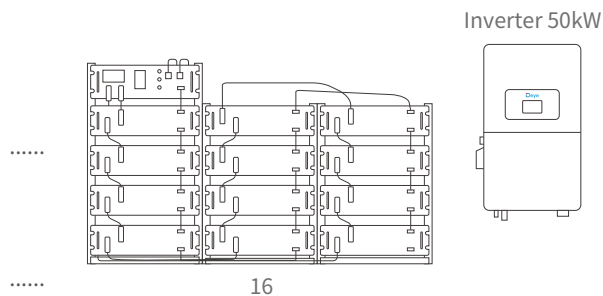


BOS-W60

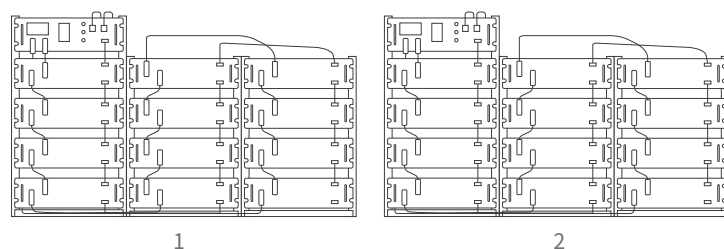


Maximum support for 10 inverters in AC parallel operation

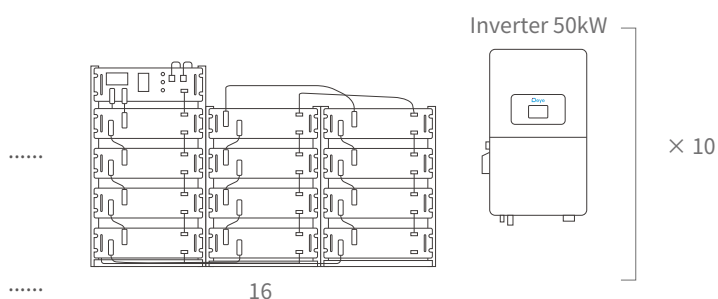


BOS-W80

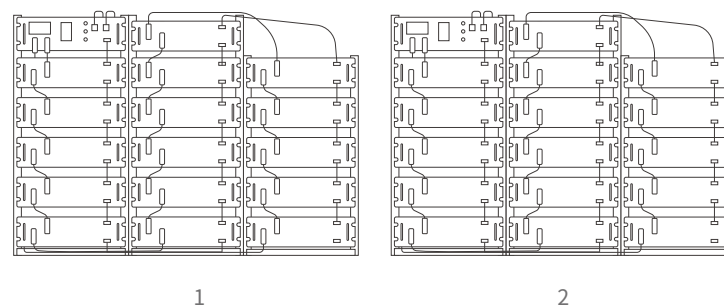


Maximum support for 16 clusters of batteries in parallel

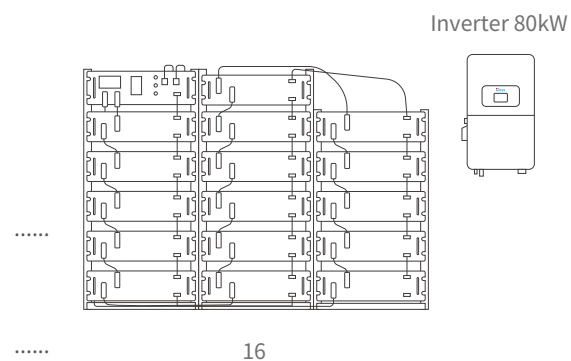

BOS-W80

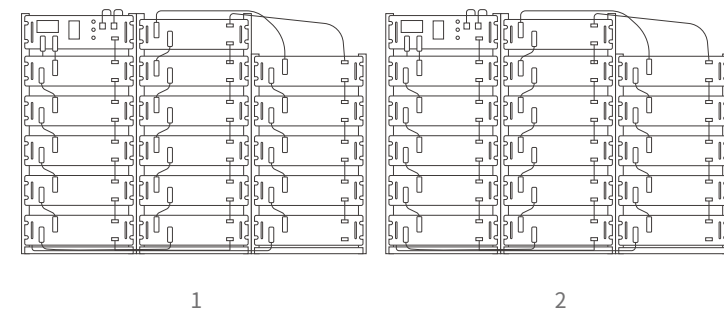

Maximum support for 10 inverters in AC parallel operation

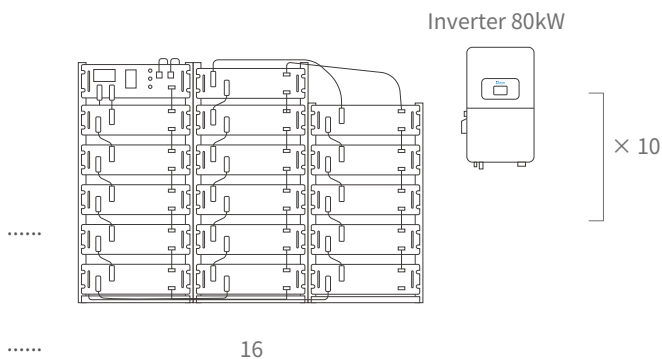



POWERING YOUR LIFE



www.deyeess.com / www.deyeinverter.com



Deye ESS / Deye New Energy